

**GENERAL NOTES :**

1) THE ANCHORAGE METHODS SHOWN HAVE BEEN DESIGNED TO COMPLY WITH THE FLORIDA BUILDING CODE 2007 EDITION FOR THE DESIGN PRESSURES LISTED IN THE APPLICABLE PRODUCT TEST REPORTS.

2) REFERENCE TEST REPORTS:  
440 SERIES: FTL-4773, 5348  
540 SERIES: FTL-4772, 5349

3) WOOD BUCKS DEPICTED AS 1x ARE LESS THAN 1 1/2" THICK. 1x WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SOLID CONCRETE. WOOD BUCKS DEPICTED AS 2x ARE 1 1/2" THICK OR GREATER. ATTACHMENT METHOD OF WOOD BUCKS SHALL BE DONE BY OTHERS.

4) MINIMUM EDGE DISTANCE FROM CENTER OF ANCHOR TO SUBSTRATE EDGE (EXCLUDING FINISH OR STUCCO) IS 1" FOR ANCHORAGE THROUGH FRAME INTO WOOD OR CONCRETE, AND 3/8" FOR ANCHORAGE THROUGH FIN INTO WOOD.

5) SHIM EACH ANCHOR LOCATION WHERE THE PRODUCT IS NOT FLUSH TO THE SUBSTRATE, USING SHIMS CAPABLE OF TRANSFERRING APPLIED LOADS.


6) ANCHORS SHALL BE COATED OR CORROSION RESISTANT AS APPROPRIATE FOR SUBSTRATE MATERIAL. DISSIMILAR MATERIALS SHALL BE PROTECTED AS REQUIRED TO PREVENT REACTIONS. ALUMINUM SHALL BE PROTECTED FROM DISSIMILAR MATERIALS AS SPECIFIED IN FLORIDA BUILDING CODE CHAPTER 20.

7) ADHESIVE SEALANT SHALL BE USED BETWEEN SUBSTRATE AND FLANGE OR FIN. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS.


8) MATERIALS USED FOR ANCHOR EVALUATIONS WERE SOUTHERN PINE, AND CONCRETE MASONRY UNITS COMPLYING WITH ASTM C-90.

9) THE 1/3 STRESS INCREASE WAS NOT USED IN THIS ANCHOR EVALUATION. ANCHORAGE AS TESTED.

*A.L.M.*  
5/10/10

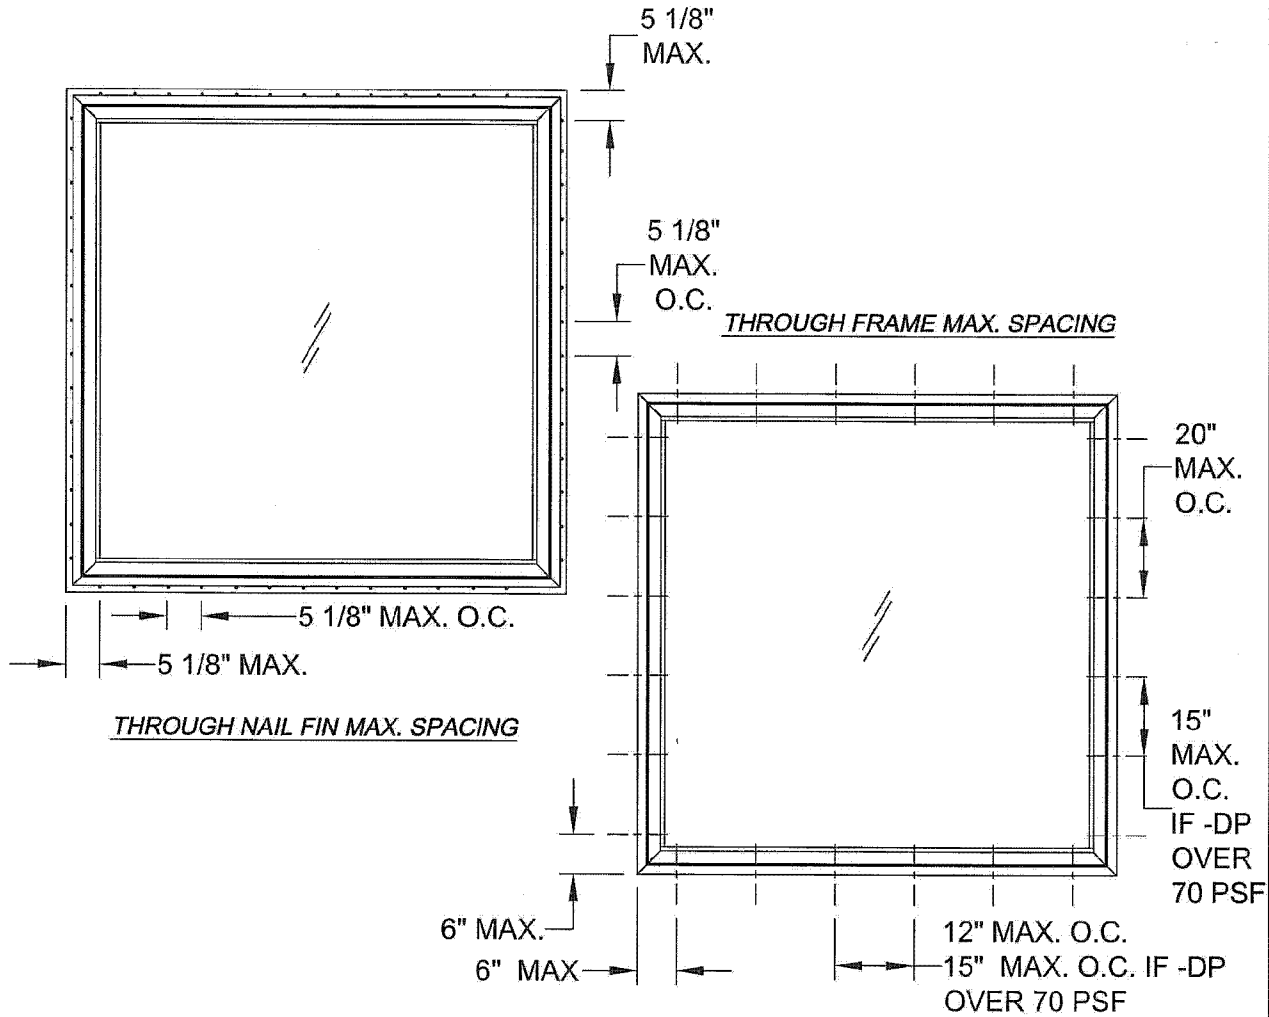

A. LYNN MILLER, P.E. PE #58705 PGT INDUSTRIES, 1070 TECHNOLOGY DRIVE, NORTH VENICE, FL 34275 941-480-1600



Rev	Date	By	Details


Material: VINYL PVC

Chkd By: \_\_\_\_\_ Date: \_\_\_\_\_


Drawn By: J ROSOWSKI Date: 05/01/10

Tolerances Unless Noted:  
Fractions: ±  
Decimal .00: ±  
Decimal .000: ± .005  
Angular: ±  
Series/Model: CA-440/540 FIXED


THE INFORMATION, DESIGN OR DATA CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF PGT INDUSTRIES AND CONSIDERED CONFIDENTIAL AND PROPRIETARY. NO PORTION OF THIS DOCUMENT MAY BE USED OR REPRODUCED IN ANY FORM WITHOUT THE EXPRESSED WRITTEN PERMISSION OF PGT INDUSTRIES.



Description: VINYL FIXED CASEMENT WDW ANCHORAGE		Size:
PGT NO:	Scale: N.T.S.	Sheet: 1 of 2
Drawn No.:	Rev:	

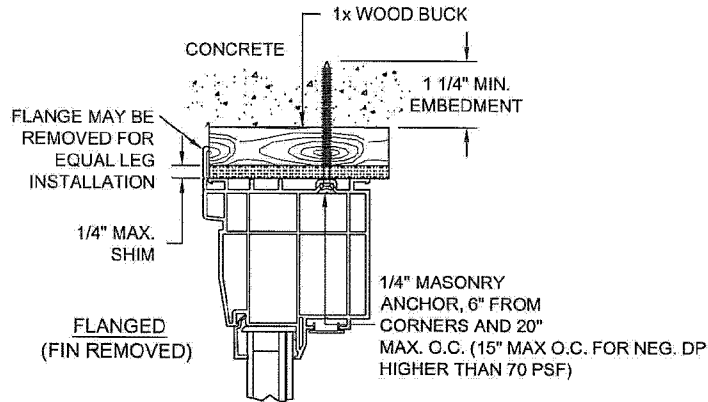


**TYPICAL HEAD ANCHORAGE DETAILS**

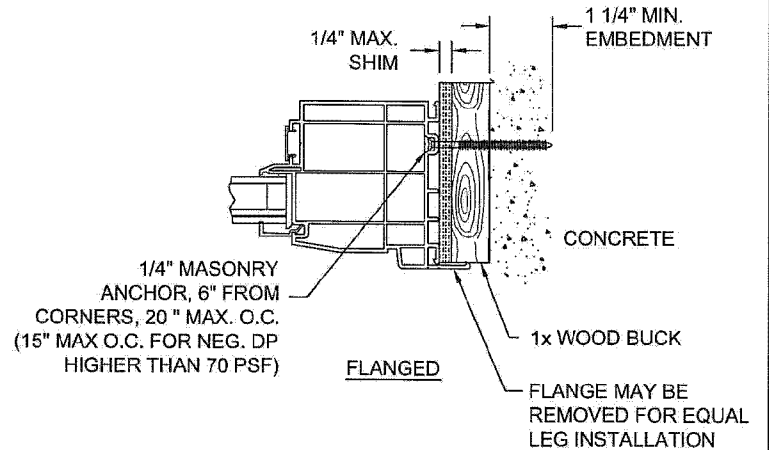


**TYPICAL JAMB ANCHORAGE DETAILS**

**MASONRY INSTALLATION**

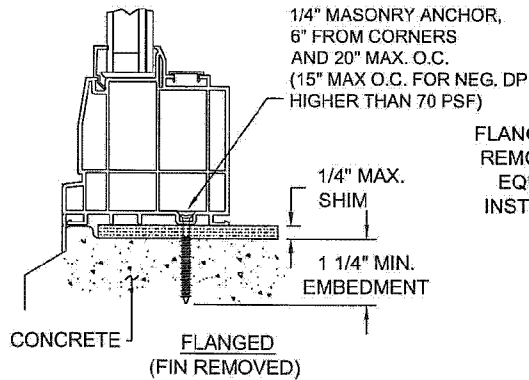

FLANGE MAY BE REMOVED FOR EQUAL LEG INSTALLATION

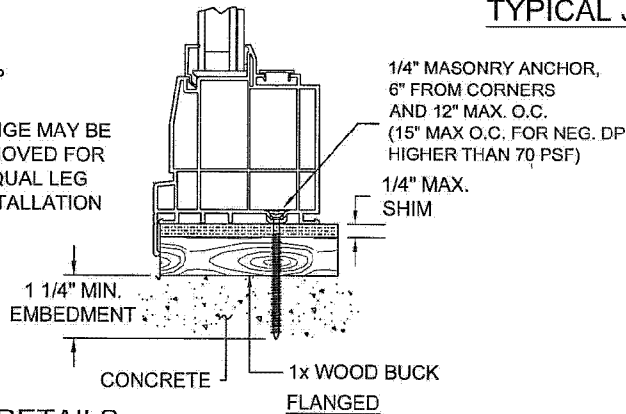


**TYPICAL SILL ANCHORAGE DETAILS**

A. LYNN MILLER, P.E.

PE #58705

PGT INDUSTRIES, 1070 TECHNOLOGY DRIVE, NORTH VENICE, FL 34275

941-480-1600



Rev	Date	By	Details

Material: VINYL

Chkd By: \_\_\_\_\_ Date: \_\_\_\_\_

Drawn By: J. Rosowski Date: 05/01/10

Tolerances Unless Noted:  
 Fractions: ±  
 Decimal .00: ±  
 Decimal .000: ± .005  
 Angular: ±

Series/Model:  
 CA-440/540 FIXED

THE INFORMATION, DESIGN OR DATA CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF PGT INDUSTRIES AND CONSIDERED CONFIDENTIAL AND PROPRIETARY NO PORTION OF THIS DOCUMENT MAY BE USED OR REPRODUCED IN ANY FORM WITHOUT THE EXPRESSED WRITTEN PERMISSION OF PGT INDUSTRIES.




SEE GENERAL NOTES SHEET 1.

GLASS SHOWN AS EXAMPLE. MAY VARY BY SERIES AND DESIGN PRESSURE REQUIREMENTS.


*A. Lynn Miller*  
 5/10/10

Description: <b>VINYL FIXED CASEMENT WDW ANCHORAGE</b>		Size:
PGT NO:	Scale: NTS	Sheet: 2 of 3
	Drawing No.:	Rev:

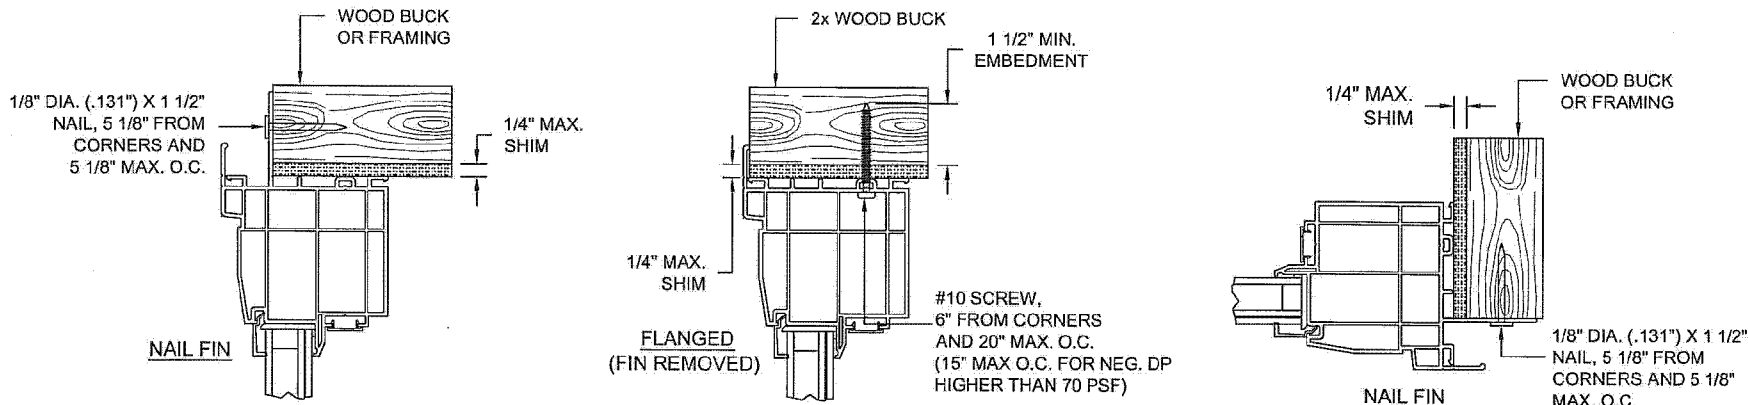

**TYPICAL HEAD ANCHORAGE DETAILS**

**WOOD-FRAME  
INSTALLATION**

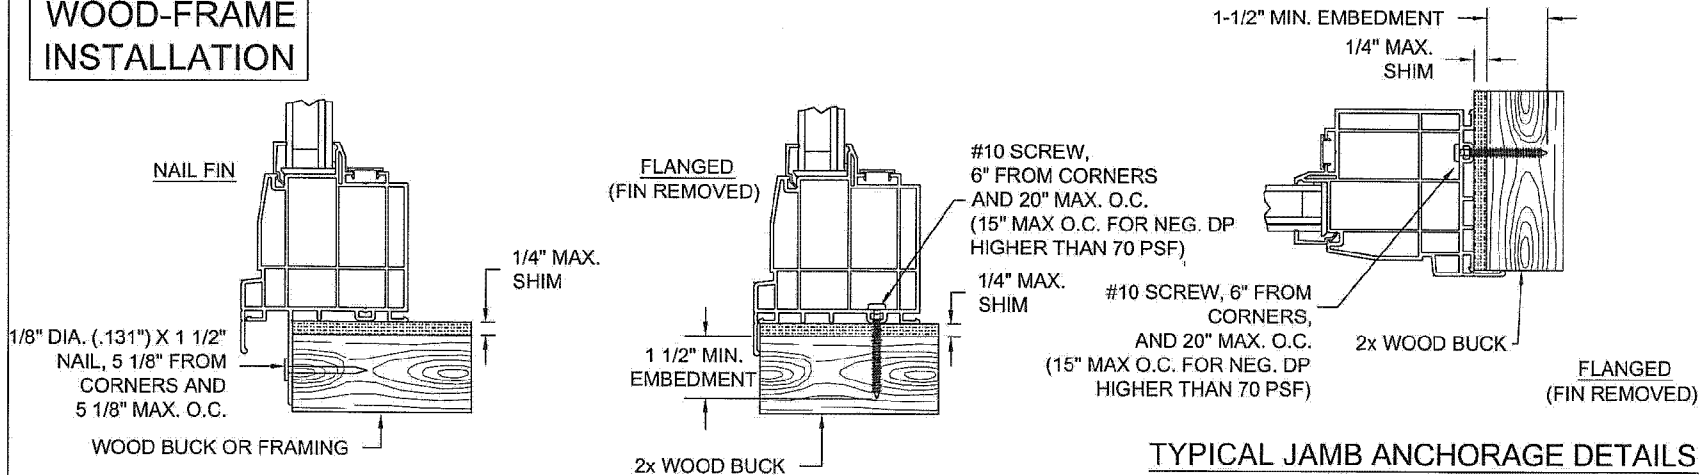

**TYPICAL SILL ANCHORAGE DETAILS**


**TYPICAL JAMB ANCHORAGE DETAILS**

SEE GENERAL NOTES SHEET 1.

GLASS SHOWN AS EXAMPLE. MAY VARY BY SERIES AND DESIGN PRESSURE REQUIREMENTS.

*J. Rosowski*  
5/10/10

A. LYNN MILLER, P.E. PE #58705 PGT INDUSTRIES, 1070 TECHNOLOGY DRIVE, NORTH VENICE, FL 34275 941-480-1600



Rev	Date	By	Details


Material: VINYL

Chkd By: Date:

Drawn By: J. Rosowski Date: 05/01/10

*Tolerances Unless Noted:*  
 Fractions: ±  
 Decimal .00: ±  
 Decimal .000: ± .005  
 Angular: ±  
 Series/Model: CA-440/540 FIXED

THE INFORMATION, DESIGN OR DATA CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF PGT INDUSTRIES AND CONSIDERED CONFIDENTIAL AND PROPRIETARY. NO PORTION OF THIS DOCUMENT MAY BE USED OR REPRODUCED IN ANY FORM WITHOUT THE EXPRESSED WRITTEN PERMISSION OF PGT INDUSTRIES.



Description: VINYL FIXED CASEMENT WDW ANCHORAGE		Size:
PGT NO:	Scale: NTS	Sheet: 3 of 3
	Drawing No.	Rev: